


TOP VIEW

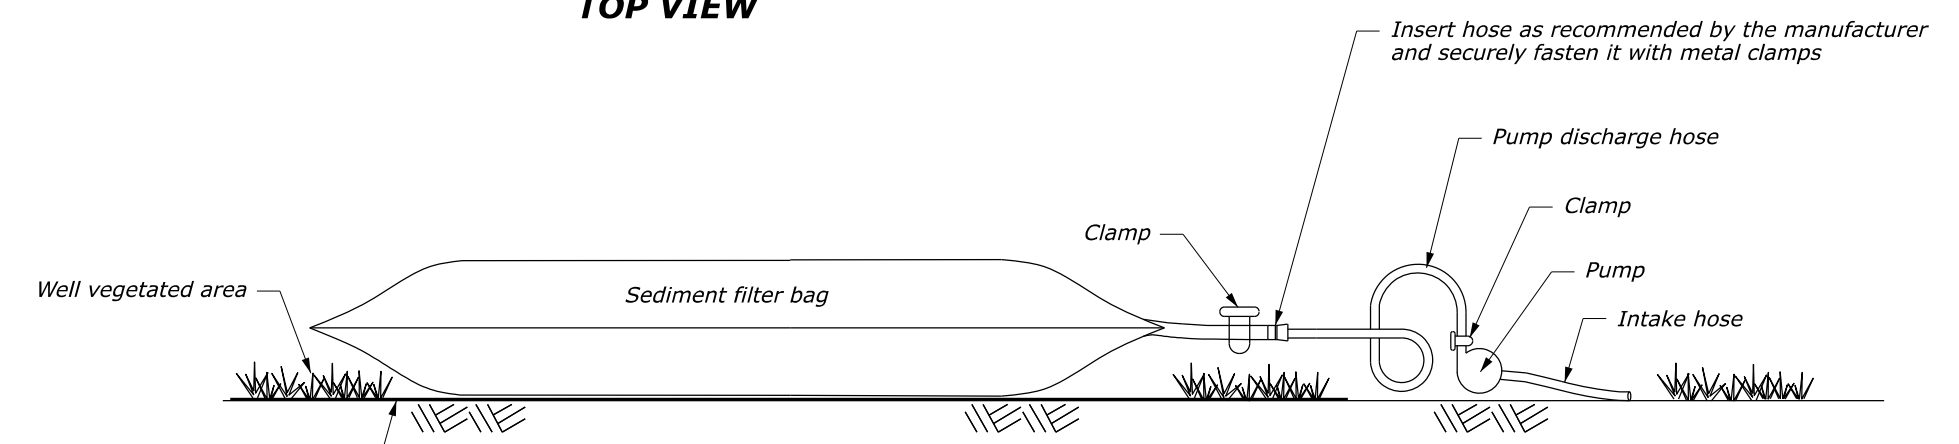

SIDE VIEW

NOTES:

1. Locate sediment filter bags in level areas (less than 5% grade) or as approved. When level areas are not available, place geotextile filter and coarse aggregate to level the sediment filter bags.
2. Locate sediment filter bags in areas accessible by equipment for maintenance and removal.
3. Insert no more than one hose in each sediment filter bag at any given time.
4. Inspect sediment filter bags daily. Replace bags when 50% of the sediment capacity has been reached or when there is a failure. Have spare sediment filter bags on site for replacement.
5. Do not permit discharge from the sediment filter bags to drain back into work or access areas of the project. Discharge onto stable and erosion resistant areas.
6. Do not cut or empty sediment filter bags on site. Restore the area according to Subsection 157.15.

Place Geotextile Filter, Class 2, Type A prior to placing aggregate only when leveling is required See Note 1

Place 6" minimum depth AASHTO No. 57 coarse aggregate only when leveling is required See Note 1

Insert hose as recommended by the manufacturer and securely fasten it with metal clamps

Insert hose as recommended by the manufacturer and securely fasten it with metal clamps

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	EFLHD DETAIL E157-10
SEDIMENT FILTER BAG	SPECIFICATION FP-24, FP-14
	APPROVED FOR USE 05/2024